

# BAKERY

retarder provers

**coldline**



At Coldline we create  
technology which simplifies  
the daily work of the  
professional baker.



One group  
One style  
One kitchen

The Nice Kitchen offers a whole range of complementary technologies for the professional kitchen to ensure dimensional and design compatability: horizontal and vertical cooking appliances, blast chillers, refrigerators, dishwashers and appliances for preparation and storage. High performance is combined with an integrated software and hardware system so as to offer maximum ergonomic comfort in a distinctive style.

coldline   modular   NEVO   TULS   LINDEK





## Cold culture and technology

### **The human factor**

At Coldline we value a dialogue with the men and women who work in the kitchen. It helps us to develop ideas and technologies which allow us to improve our products.

### **“Cold” culture**

In our laboratory, we monitor our appliances in extreme conditions. This ensures that they will be able to perform optimally even when used intensively. We subject them to strict field testing at our modern cooking center, where our group of corporate chefs validate all our new products.

### **100% integrated process**

Research and development, design and production activities are carried out exclusively in our factories in Torreglia (PD), Italy. All business processes are founded upon the principles of reliability, efficiency and energy savings.





## Proving made easy

We offer ideal solutions for every catering business.  
A wide range of sizes, energy savings and high performance are the  
benefits of cold temperatures and gentle heat, produced by Coldline.



### **Bakeries**

Bakeries  
Neighborhood bakeries  
Baking workshops



### **Pastry**

Confectioners  
Producers of large  
proved products



### **Pizzeria**

Gourmet pizzerias  
Pizza take-aways



### **Catering**

Hotels  
Restaurants  
Cooking centres  
Companies  
Hospitals



# The exclusive monitoring system The Nice Kitchen

## What is Cosmo?

Cosmo is the innovative Wi-Fi technology that allows you to connect all The Nice Kitchen appliances (Coldline, Modular, Nevo) in the kitchen and monitor them remotely with a single App.

## Notifications and alerts

Cosmo detects any abnormal functioning of the equipment and sends a WhatsApp, SMS or e-mail notification.

## Haccp report

With the CosmoApp, you can view and download detailed HACCP reports for each connected appliance.

## Software always updated

The software receives periodic updates with the latest developed features.

## Work scheduling

Kitchen activities and work cycles can be scheduled through the CosmoApp and sent to the machine, where the operator can start them.

## Efficiency under control

Cosmo compares the appliance's performance with ideal standards. In case of significant differences, it suggests the necessary maintenance actions to ensure optimal operational performance.





# Energy management and cost savings

## What is Balance?


Balance is the innovative Wi-Fi technology developed by The Nice Kitchen that manages kitchen energy in a virtuous way and saves on fixed costs for the restaurant business, generating a profit of thousands of Euros per year.

## Guaranteed savings

With Balance you maintain 100% of the performance of appliances installed in a professional kitchen using only 50% of the nominal power. Modular, Coldline and Nevo appliances are the only ones that allow a kitchen with integrated energy control.

## No installation costs

Balance, thanks to the Wi-Fi connection, requires no masonry and installation costs and makes it possible to realise kitchens with power supply even in locations with limited energy availability.

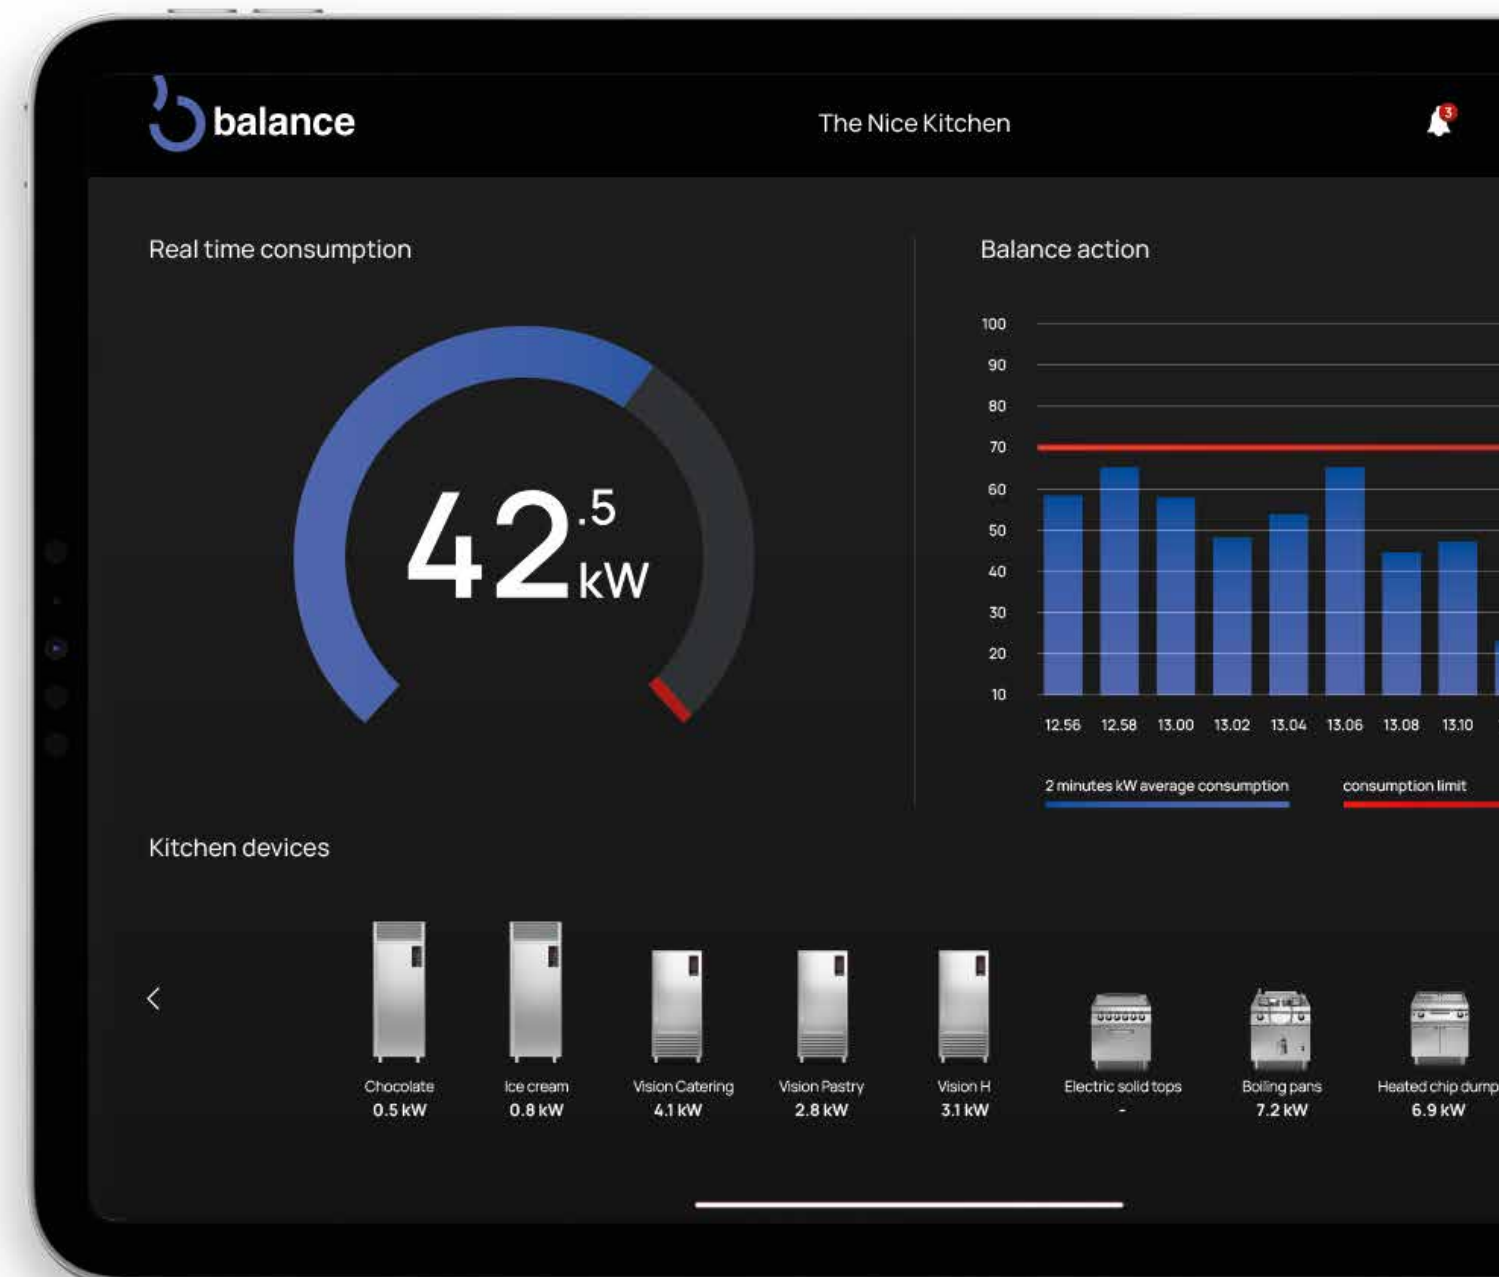



# FSS, Coldline technology for an economic and fast service


LEVTRONIC provers are equipped with a refrigeration system independent of the body (Fast Service System), a feature that produces huge benefits for maintenance; all components are easily accessible for simple and timely interventions.



# High efficiency with a uniform and constant temperature


Unlike systems from other companies, Coldline cold storage cabinets position an evaporator inside the compartment, which ensures effective air circulation and the maintenance of a perfect temperature, even in cases where it is subject to heavy use. Thanks to the wide spaces in the compartment, the condenser and compressor are always functioning in optimal conditions, which ensures reliability and efficiency over time.

## Coldline

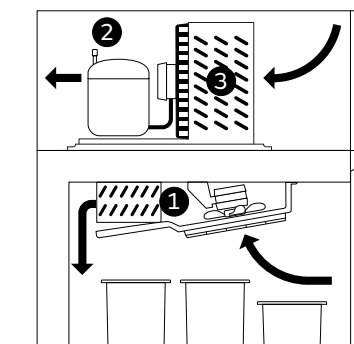


1 Evaporator    2 Compressor    3 Condensing unit

## Other systems

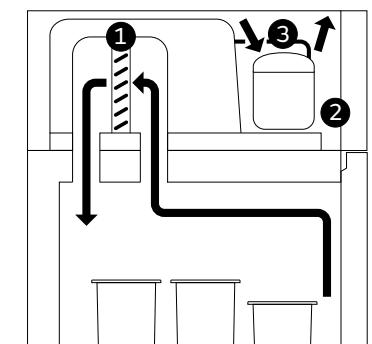

LEVTRONIC counters maintain a perfectly uniform temperature in all the compartments, leading to a regular and homogenous proving of the dough.

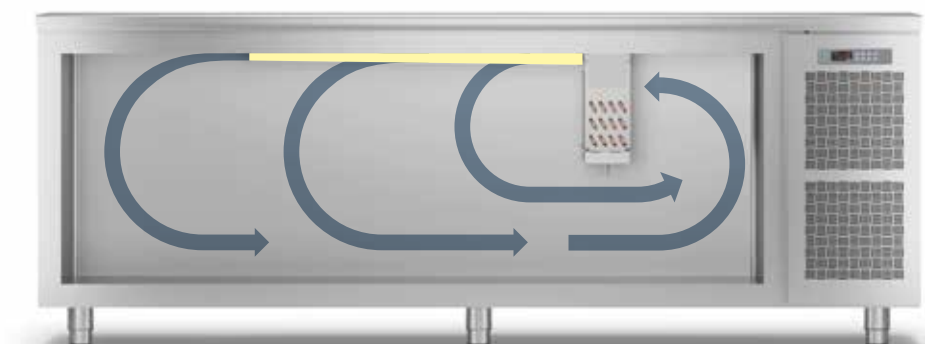



Retarder prover  
cabinets







## LEVTRONIC, the secret behind your proved products

Proving is a delicate process which determines the quality and fragrance of the finished product: the variables involved are time, temperature and humidity, which change with the changing of the seasons.

The new generation of LEVTRONIC counters, cabinets and Roll-In models create a microclimate ideal for maturing any dough, regardless of the weather conditions. You can customise a program based on the type of yeast and flour, and water characteristics to achieve extraordinary results every time.





## Functions

### Retarder proving

By using low temperatures it is possible to slow down or to stop the yeast's fermentation, and then reactivate it later to obtain proved dough at the desired time. Depending on the ingredients used, you can customise the stages of stopping, holding, reactivating, proving and storage.

### Manual proving

It is possible to activate a direct proving program with a set temperature, level of humidity and ventilation strength for a defined period of time at the end of the program. LEVTRONIC preserves the dough in optimal condition until baking.

### Continuous cycle

Use the manual function to set the time, temperature, humidity and ventilation levels. LEVTRONIC proves the dough using a continuous cycle without stopping.

### Storage

Food is stored at the desired temperature between -6°C and +10°C or -20°C and +10°C.

### Controls



#### Time

Decide the duration of the proving phase




#### Temperature

Choose the best temperature for the maturation of the dough, from -6°C to +40°C



#### Humidity

Decide on the ideal percentage of moisture, between 45% and 95%



#### Ventilation

Decide on the optimal level of ventilation intensity, from 25% to 100%




## Create your customised programs




### Create new programs

With LEVTRONIC you have a list of system programs available. The settings can be easily consulted in the current cycle, and modified by saving a new program in the personal menu.



### Personal layout


You can change the position of the recipe keys by creating your own layout.



### Instant modification

With a simple touch, you can check and change the settings of the current program.

## A 5 phase retarder prover for relaxing work

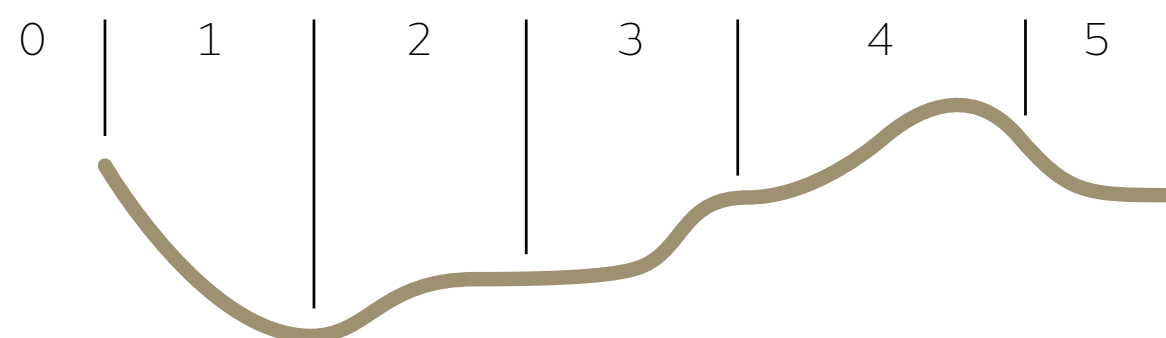

0

### Temperature

Temperature of the finished dough, forming the cooked gluten.

1

### Stopping

The dough is rapidly cooled and the fermentation of the yeasts is inhibited.

2

### Holding

The temperature is kept below 3°C. The yeast remains inactive until reactivated.

3

### Reactivation

The temperature gradually increases. The fermentation of the yeast is slowly reactivated.

4

### Proving

The temperature and humidity increase to the set levels. The fermentation of the dough is completed.

5

### Storage

The proved dough is kept at a controlled temperature and humidity until cooked.





# Cabinets, counters, Roll-In traditional proving

Baking bread, croissants, brioches require daily activities, such as kneading, proving and cooking which make substantial demands on your time. The LEVTRONIC retarder provers means you will save time and money. Cabinets, counters and Roll-In versions in different sizes, with different capacities, to satisfy all needs, big and small.





# LEVTRONIC cabinets, provers tireless

## Elegant and refined design

The elegant glass touch display, installed so it is set flush to the panel, with rounded external corners and the high quality finishing give the LEVTRONIC cabinet a solid and refined appearance.

## Controlled air flow

The differentiated and channelled air flow guarantees maximum temperature homogeneity on all the shelves, without directly altering the product, keeping it hydrated and its quality intact, without superficial cracks.

## Suitable for every workplace

Four models with different widths and depths, capacity ranges from 25 to 50 EN60x40 trays. LEVTRONIC cabinets adapt perfectly to every workspace, and offer high quality standards.







## LEVTRONIC Roll-In, proving in motion

### **EN60x40 or EN60x80**

The J10 model, with a depth of 815 mm, takes up the smallest floor space in the category, ensuring a well-organised workshop, even when space is limited. The J12 version has generous dimensions with a depth of 1015 mm for use with standard EN60x40 or compact EN60x80 trolleys.

### **Speed and practicality**

In a well-organized workshop, the efficient movement of the trays is of great importance. With LEVTRONIC Roll-In work is rational and efficient. The stainless steel trolley (optional) streamlines the preparation phase and movements are practical and fast.

### **Blast freezing and proving**

By using the MODI or VISION blast chiller, you will be able to improve preparation by producing and blast freezing larger quantities of dough in advance. Over the following days, you can prove part or all of the dough depending on the sales requirements, eliminating the risk of overproduction and waste.

# LEVTRONIC technology

## Distinctive characteristics

### Cabinets

- Reinforced base for the installation of feet or plinth
- Stainless steel handle, thickness 2 mm
- Condensation drain
- Pedal opening system (optional)
- Removable racks and slides, without the need for tools

### Roll-In models

- Reinforced base in stainless steel AISI 304
- Handle with snap closing
- Ramp in stainless steel
- Reinforced protected sides



## Common characteristics



**Homogeneous leavening**  
The air flow envelops the proved enwrapping the leavened products homogeneously throughout the cabinet in every position and on all levels.



**Touch screen panel**  
4.3" touch screen display equipped with a USB socket to save HACCP data.



**Lighting**  
LED lighting, which does not affect the temperature in the chamber.



**Water filter**  
The water purification filter is included. The cartridge is replaceable in order to maintain high performance standards.



**Key lock**  
Key lock on the front of the cabinet or on the handle in the Roll-In models.



**Replaceable gaskets with high performance sealing**  
Triple chamber geometry with innovative D7 compound, which produces 35% higher insulation efficiency than traditional models.



**Door locks and door stops**  
Reversible self-closing doors with 105° stop, equipped with key lock.

## Other characteristics

External and internal body in stainless steel AISI 304. External back in galvanized steel

Anti-corrosion painted evaporator

Plug-In and Remote versions

Rounded internal and external corners

Operates in climate class 5

Modbus-RTU connection

CFC/HCFC FREE, insulation thickness: 75 mm

Automatic evaporation of condensing water

Cosmo supervision Wi-Fi system

Balance energy management Wi-Fi system with Balance Console (optional)


Refrigerant gas R290 ecological GWP=3

Customised proving programs



# LEVTRONIC cabinets

550



650



700



900





Size (mm)		
Temperature (°C)		
Energy class		
Annual consumption (kWh)		
Voltage		
Equipment		
Versions		

L 630 D 815 H 2085	
-6°+40°	-20°+40°
C	D
454	2256
220/240V-50Hz	
20 pair of slides for EN60x40 trays	
Remote	
Glass door	
Special voltage	

L 810 D 715 H 2085	
-6°+40°	-20°+40°
E	D
858	2212
220/240V-50Hz	
20 pair of slides for EN60x40 trays	
Remote	
Glass door	
Special voltage	

L 740 D 815 H 2085	
-6°+40°	-20°+40°
D	E
746	2508
220/240V-50Hz	
20 pair of slides for EN60x40 trays	
Remote	
Glass door	
Special voltage	

L 810 D 1015 H 2085	
-6°+40°	-20°+40°
E	E
1261	3562
220/240V-50Hz	
20 pair of slides for EN60x80 trays	
Remote	
Glass door	
Special voltage	

# Roll-In LEVTRONIC

## J10

Trolley EN60x40



Size (mm)
Maximum trolley sizes (mm)
Temperature (°C)
Voltage
Versions

L 810 D 815 H 2115
L 470 D 620 H 1500 (EN60x40)
-6°+40°
220/240V-50Hz
Special voltage

## J12

Trolley EN60x80



L 810 D 1015 H 2115
L 648 D 810 H 1500 (EN60x80)
-6°+40°
220/240V-50Hz
Special voltage





Retarder prover  
counters





# LEVTRONIC counters: work on top, prove below

## Spacious and practical

Work the bread, brioches and croissants on the sturdy worktop, insert the product into the fridge to stop the proving process, and set the program for when it you want it ready for cooking. The internal volume guarantees the highest storage capacity: 7 trays EN60x40, with 75 mm step, for each compartment.

## Controlled air flow

The conveyed and differentiated air flow guarantees maximum temperature homogeneity to all the shelves in each compartment. The dough is gently enveloped, keeping it hydrated and without superficial cracks.

## Solid and suitable for every workshop

To ensure you have the perfectly integrated layout in your workshop, models with mobile body heights of 660, 710 and 760 mm are available. The technical compartment positioned on the right is an integral part of the counter and with a thick, high performance insulation for maximum soundproofing.



# LEVTRONIC counters technology



## Principal characteristics



**Sharp-edged worktop**  
Reinforced worktop with sharp-edged front edge, splashback h 100 mm with 10 mm inner radius and rear closure to avoid dirt accumulation.



**Doors**  
Automatic reversible doors with 105° stop.



**Slides and racks**  
Racks and slides made of stainless steel AISI 304.



**Removable condensing unit**  
On slides for inspection and cleaning.



**Water filter**  
A water purification filter is included. It has a replaceable cartridge in order to maintain high standards.



**Replaceable gaskets with high performance sealing**  
Triple chamber geometry with innovative D7 compound, which produces 35% higher insulation efficiency than traditional models.



**Reinforced base**  
The reinforced base allows it to be installed on feet on a fixed or mobile plinth.



**Touch screen panel**  
4.3" touchscreen display equipped with a USB socket to save your HACCP data.

## Other characteristics

The external, internal and back is made from AISI 304 stainless steel. Rounded corners

Operates in climate class 5

Soundproofed technical compartment with internal engine

Anti-corrosion painted evaporator

Customised proving programs

Hot gas defrost which automatically evaporates condensation

CFC/HCFC FREE, insulation thickness: 60 mm

Condensation drain

Balance energy management Wi-Fi system with Balance Console (optional)

Refrigerant gas R290 ecological GWP=3

Humidifier to regulate percentage of humidity

Cosmo Wi-Fi supervision system, Modbus-RTU connection



# LEVTRONIC counters

## 2 doors



Temperature (°C)	-6°+40°
Size* (mm)	L 1450 D 800 H 950
Energy class	D
Annual consumption (kWh)	1321
Voltage	220/240V-50Hz
Equipment	8 pair of slides for EN60x40 trays
Body height (mm)	660 - 710 - 760
Versions	Top without splashback Without top Special voltage

\* body height 710 mm top with splashback

## 3 doors



Temperature (°C)	-6°+40°
Size* (mm)	L 2005 D 800 H 950
Energy class	D
Annual consumption (kWh)	1544
Voltage	220/240V-50Hz
Equipment	12 pair of slides for EN60x40 trays
Body height (mm)	660 - 710 - 760
Versions	Top without splashback Without top Special voltage

\* body height 710 mm top with splashback



**Coldline Srl**  
Via Enrico Mattei, 38 - 35038 Torreglia Padova - Italy  
Tel. +39 049.9903830 - info@coldline.it - coldline.it

**The Nice Kitchen**  
thenicekitchen.com

Coldline reserves the right to make, at any time  
and without notice, improvements to the products  
contained in this price list.





**The Nice Kitchen®**